
## Antenna mount for NATO links 4.45 – 5.00 GHz



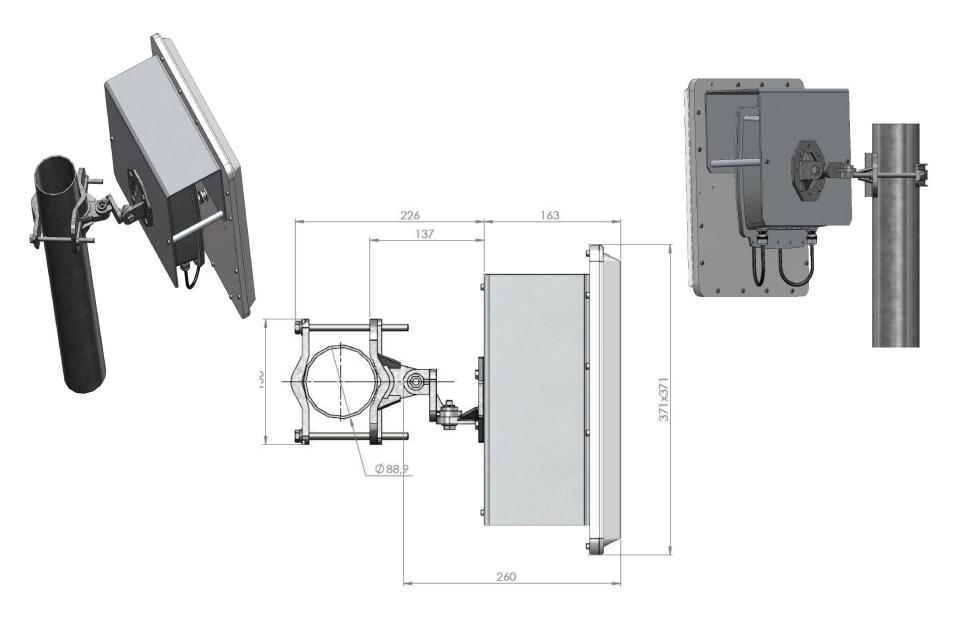

## Antenna mount for NATO links 4.45 – 5.00 GHz

## Mounting instructions - Azimuth and Elevation Adjustable Mount MNT-22 REV. 5





Fig. 2 TEETH (13)(8)(6)

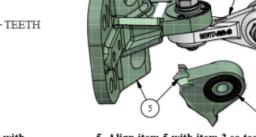



- 1. Align holes of item 2 with 4 studs on back plane of the antenna (not shown).
- 2. Connect item 2 to the antenna with spring washers (11), plain washers (10) and nuts (12).
- 3. Tighten the nuts at a torque of 30 Lbs x In.

4. Align item 3 with item 2 so teeth of item 2 face teeth of item 3. Connect with items 6, 7, 8, 13. Leave screw slightly loose.

5. Align item 5 with item 3 so teeth of item 5 face teeth of item 3. Connect with items 6, 7, 8, 13. Leave screw slightly loose.

Fig. 3



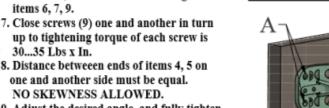


9. Adjust the desired angle, and fully tighten the loose screws (paragraph 4, 5) at a torque of 30 Lbs x In.

illustrated, and connect them using

Fig. 4 6. Attach items 4, 5 to the pole as


NOTE:

MOUNT SUITABLE FOR POLES Ø1"-4".



	Parts List		
	ITEM	QTY	DESCRIPTION
	1	1	POLE 1"-4" (NOT SUPPLIED)
	2	1	MNT-22-1
	3	1	MNT-22-2
	4	1	MNT-22-4
	5	1	MNT-22-3
	6	4	Helical Spring Lock Washer St. St.
			#5/16
	7	4	Plain Washer St. St. #5/16
	8	2	Hex Cap Screw St. St. NC 5/16-18 x
			1.25"
	9	2	Hex Cap Screw St. St. NC 5/16-18 x 5"
	10	4	Plain Washer St. St. #1/4
	11	4	Helical Spring Lock Washer St. St.#1/4
VS	12	4	Hex Nut St. St. NC 1/4-20
	13	2	Hex Nut St. St. NC 5/16-18

- 10. Make assemblies as illustrated in Fig. 1, 2.
- 11. Attach item 5 to the wall. Fasten it with screws 1/4" or M6 using holes 'A'. (Screws not shown.)
- 12. Align item 3 with item 5 so teeth of item 3 face teeth of item 5. Connect as illustrated in Fig. 3.
- 13. Adjust the desired angle, and fully tighten the loose screw (paragraph 4, 5) at a torque of 30 Lbs x In.



Hypercable nfo@hypercable.fr - www.hypercable.fr